


The 'ONE' Printer You Need!

PayCheck®

NextGen™

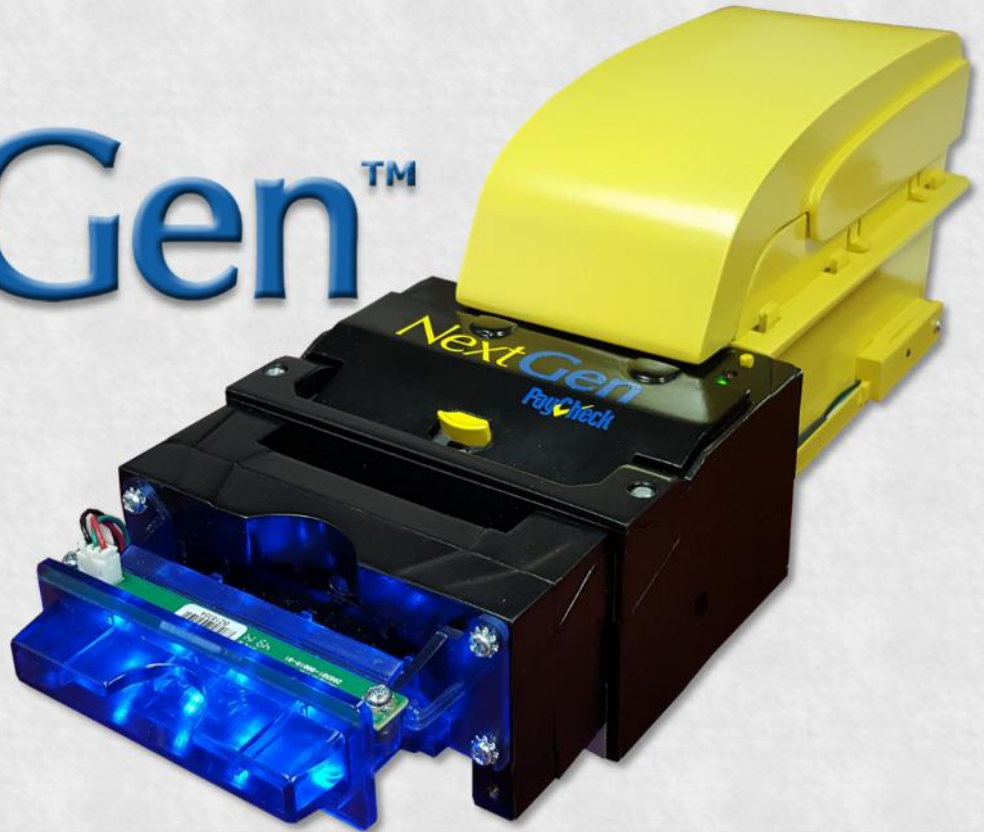

Greater value, more reliable and more capable than any of its competitors on the market today, Paycheck® NextGen™ is the 'One' printer venues need to ensure reliability, functionality and connectivity.


FEATURES

- Longest print head life
- Fastest printer in gaming
- Integrated anti-jamming
- Paper low on last ticket or more (adjustable)
- PC based infrastructure
- Straight paper path
- Easy paper path access
- Multiple USB ports, MicroSD reader, HDMI, Bluetooth
- Durable, intuitive, modular design
- Truly hot swappable
- Standard casing footprint
- Standard 400 Ticket Tray (600, 800 extensions)
- Couponing ready
- RoHS compliant

BENEFITS

- Better Reliability and lower overall cost
- Greater Customer Satisfaction
- Reduces paper jams no matter the bezel used
- Save on paper cost by no longer wasting tickets
- Use any fonts, images and logos for your tickets
- No jamming within a presenter
- Makes maintenance fast & easy
- Allows for easy field service and upgrades
- Gives easy access to all major components
- Easy replacement without powering down
- Fast plug-and-play replacement
- Reduce downtime with larger ticket capacity
- Advertise your services easily
- Usable in all jurisdictions worldwide

NANOPTIX

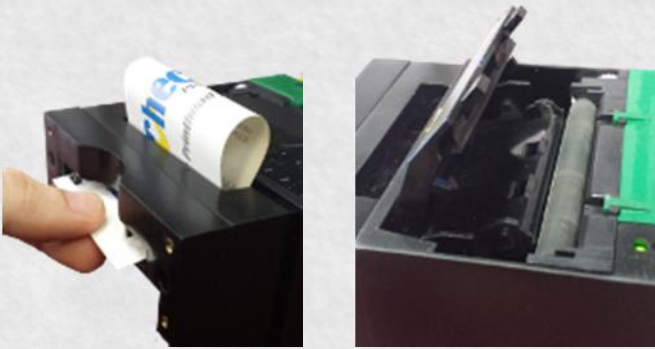

Integrated Anti-jamming Paper Path Easy access for simplified maintenance

DIMENSIONS (HxWxD)

- 67x113x286

WEIGHT

- 1.25 kg (2.75 lbs)

PRINTING CHARACTERISTICS

- Print Speed
 - 250 (9.8") per second in text mode(monochrome)
 - 125mm (5") per second in two-color mode
- 520 dots per line
- 203 dots per inch
- 62.5mm (2.46") print zone width (near-edge printing)
- 8 dots/mm horizontal and vertical

PAPER/MEDIA

- Type: top-coated thermal sensitive
(Qualified for Kanzaki TO381N, Appleton Royale, Nashua Corporation NT 10149)
- Ticket width x length
65mm (2.56") x 156mm (6.12") – TITO format
- Ticket thickness: 0.114-0.127mm (0.0045-0.005")
- Perf. Strength: 1.59 +/- 0.27kg (3.5 +/- 0.6 lbs)
- Monochrome or three 2-color choices: red/black, blue/black, green/black

POWER REQUIREMENTS

- 24/12 VDC at 2.4A Maximum (excluding exit lamp)
- Exit lamp: 24/12 VDC
- 20mA required by lighted bezel
- Bezel port can sync up to 2A

RELIABILITY

- Print head:
 - 100km or 100 million pulses for monochrome (approximately 640,000 TITO tickets)
 - 50km or 50 million pulses for 2 color

COMMUNICATION INTERFACE OPTIONS

- Bidirectional RS-232 (up to 57.6 kbps)
- 3 Dedicated USB 2.0 Communication Ports
- 2 Slave USB 2.0 Communication Ports
- HDMI port, 1080p
- Ethernet Port
- MicroSD Card Reader
- Bluetooth
- Netplex protocol
- GDS protocol
- Windows driver

REGULATORY INFORMATION


- CSA Ulc
- FCC Class B
- CE mark
- ICES

ENVIRONMENTAL

- Operating temperature: 0 to 70°C (32 to 158°F)
- Storage & shipping temperature: -20 to 75°C (-4 to 167°F)
- Operating humidity: 5 to 90% RH (non-condensing)

CONFIGURABLE OPTIONS

- Multiple bezel color options: Blue, Green, Red
- Ticket tray note sizes: 400 (default), 600, 800

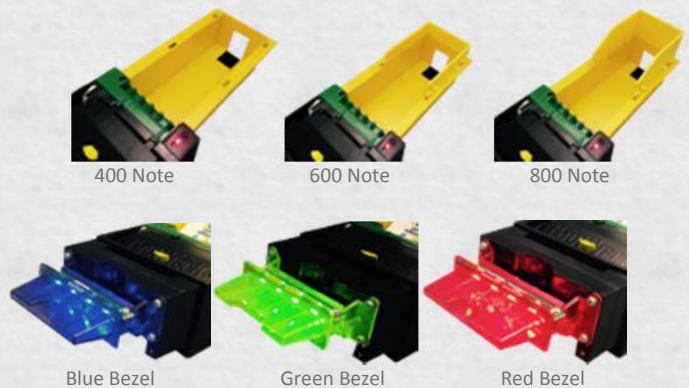

NANOPTIX

Toll Free: 1-888-983-3030 – Direct: 1-506-384-3388 – Email: info@nanoptix.com
www.Nanoptix.com

Nanoptix and Nanoptix logo are registered trademarks of Nanoptix Inc.
 All other marks are registered trademarks of their respective owners. Nanoptix reserves the right to change product specifications without notice.